

Tekna

Wall-mounted solenoid-driven dosing pumps

Tekna is one of the most widespread, well-known and appreciated wall-mounted electromagnetic pump ranges in the world, a range that has evolved over the years by drawing upon the feedback of thousands of users across the globe. The series offers multiple models, with analogue and digital interfaces, able to satisfy every installation need and to offer a reliable and effective solution in any situation.

- Flow rate range: 0.4 – 110 l/h, up to 20 bar
- Wetted parts: PVDF, SS316L, PTFE, FFKM, EPDM, FKM-B and Ceramic
- Analogue and digital range with constant or proportional dosage



CEII 3GD
Ex ic nA IIB T4 Gc
Ex tc III CT120°C Dc IP65

Features

- Pump body in PVDF
- Kit available in PVDF or PVDF-T
- Patented algorithm for driving the solenoid
- **AKS:** Constant, with analogic interface (potentiometer)
- **AKL:** Constant with level, analogic interface
- **APG:** Proportional dosing (4 - 20 mA/pulse), analogic interface
- **TPG:** Multifunction proportional dosing (4 - 20 mA/pulse), digital interface
- **TPR:** Instrument-pump with pH/ORP input, digital interface
- **TCK:** Weekly timed pump, digital interface
- Available in ATEX-certificated models (Zone 2)
- Models available with 24 Vac and 12 Vdc power supply
- Available with special seals in PTFE or FFKM
- Available with auto-degassing pump head in PVDF
- Available with Modbus RTU RS485 port for:
 - Integrating the pump in a more complex plant, locally managed by a PLC or an industrial PC, where other Modbus devices are already present
 - Connect the pump to a KommBox or a KommSpot and, through them, to the internet for management via the SekoWeb app or online portal

- Numerous Tekna models are available, with analogic or digital interface, to satisfy almost any request from the market.
- Tekna delivers reduced energy consumption thanks to an embedded stabilised multi-range power supply (100–240 Vac, 50/60 Hz). Thanks to the SEKO patented algorithm, the solenoid only draws the power strictly required to activate the pump, based on the actual working conditions, which improves pump efficiency and saves energy. The algorithm also compensates for any fluctuation of the power supply voltage, for giving a precise and accurate dosage in any condition.
- Tekna is also available in ATEX standard-compliant versions, with constant or proportional dosage functions and a digital interface. This model comes with a SS316L pump body as standard.

Features & benefits



Easy to fit

The installer-friendly bracket enables quick and simple wall mounting.




Premium seals

Available with special seals in FFKM or PTFE.



Quality and strength

Pump body comes in PVDF as standard.



Long-life diaphragm

PTFE diaphragm, guaranteed for 5 years.




Reliable seals

Standard seals in FKM-B or EPDM.



Robust and reliable

Robust and reliable for extended service life.

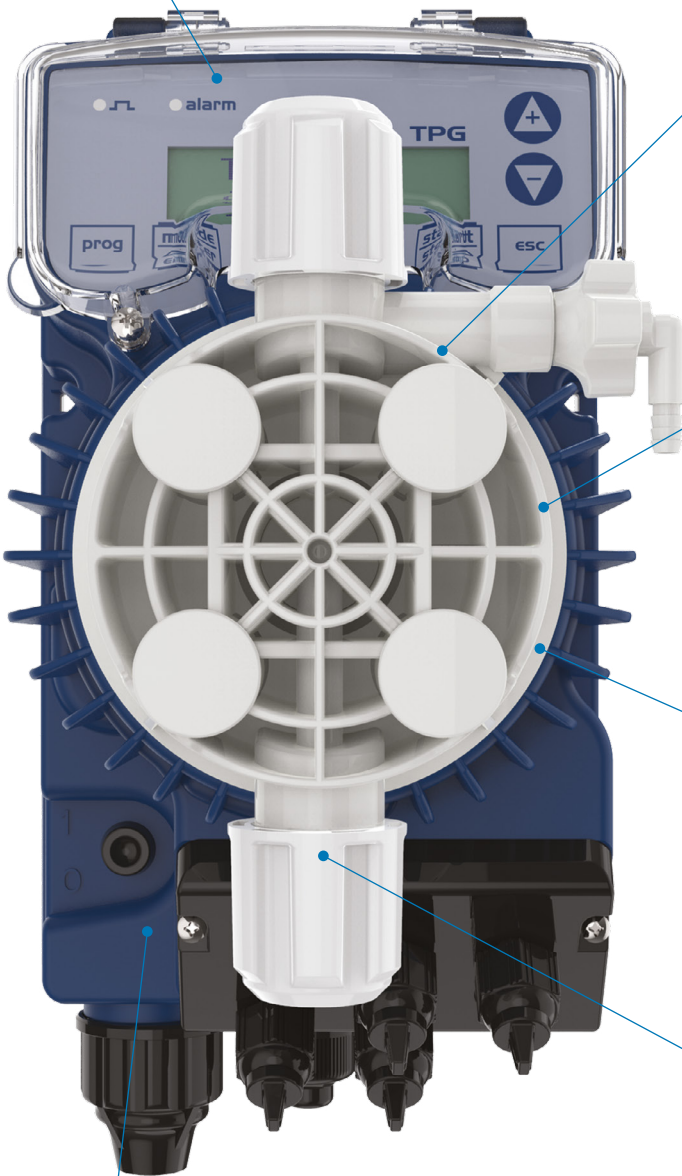

Tekna key code

Model								
AKS	Constant dosing, without input for level probe. Flow rate adjustable via analogic interface (potentiometer).							
AKL	Constant dosage, with input for level probe. Flow rate adjustable via analogic interface (potentiometer).							
APG	Proportional dosing to an analogue signal (4 - 20 mA) or to digital frequency signal (pulse). With analogic interface (potentiometer).							
TPG	Multifunction pump. Proportional dosing to an analogue signal (4 - 20 mA) or to digital frequency signal (pulse). PPM mode, Timer mode, batch mode and others. Digital interface.							
TPR	Instrument-pump. Dosage in accordance with the measured pH or redox value. PT100 probe input also available for thermal compensation. Digital interface.							
TCK	Timed pump. Weekly programmable dosage, at the programmed flow rate, and other timed dosing modes. Digital interface.							
Hydraulics	Pressure [bar]	Flow rate [l/h]	Capacity [cc/stroke]	Ø Hydr Connections IN/EXT.[mm]	Frequency [stroke/min]	Consumption [W]	Weight [kg]	Packing size L x W x H [mm]
500	20	0.4	0.06	4/7 delivery 4/6 suction	120	15	3.9	295 x 245 x 185
	16	0.8	0.11					
	10	1.2	0.17					
	6	1.5	0.21					
600	20	2.5	0.35	4/7 delivery 4/6 suction	120	20	3.9	295 x 245 x 185
	18	3	0.42					
	14	4.2	0.58					
603	12	4	0.42	4/6	160	20	3.4	295 x 245 x 185
	10	5	0.52					
	8	6	0.63					
	2	8	0.83					
800	16	7	0.38	4/6	300	20	4.4	295 x 245 x 185
	10	10	0.55					
	5	15	0.83					
803	1	18	1.00	8/12	300	40	4.4	295 x 245 x 185
	5	20	1.11					
	4	32	1.78					
	2	62	3.44					
	0.1	110	6.11					
Power supply								
N	100 - 240 Vac, 50/60 Hz		Wide range					
O	24 Vac, 50/60 Hz							
L	12 Vdc							
Liquid end				Body	Balls	Diaphragm		
H				PVDF	Ceramic	PTFE		
A	Automatic degassing			PVDF	Ceramic	PTFE		
I				SS316L	SS316L	PTFE		
Installation kit								
H	PVDF							
P	PVDF-T							
X	PVDF - 1.5 bar injection valve							
0	Without kit (ATEX only)							
O-Rings								
0	FKM-B							
1	EPDM							
2	PTFE							
3	FFKM							
Optional								
0	Standard							
Optional/customisation								
00	Standard							
M0	Modbus RTU RS485							
X0	ATEX certification (TPG and TCK only)							
TPG	603	N	H	H	0	0	00	